

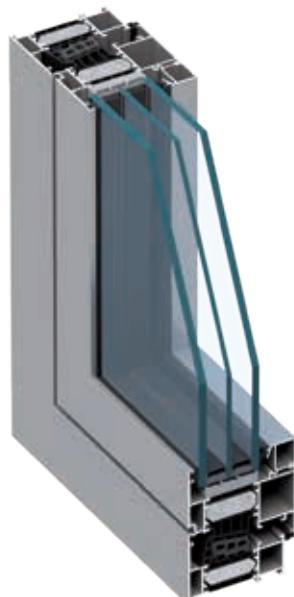


LET'S BUILD A BETTER FUTURE

Window & door system **MB-86N**

The highly efficient MB-86N window and door system makes it possible to satisfy the diverse needs of users. There are two versions of the profiles, the ST and the SI, which are designed to meet different thermal energy efficiency requirements. The system provides superb performance parameters.

Another advantage of the MB-86N is the high durability of the profiles, which make it possible to produce large-scale and heavy structures. Several versions are available. The MB-86US is a window with a concealed vent. The MB-86 Casement provides an outward-opening window with a thermal break. The MB-86B has been developed to meet the requirements of the Belgian market.



U_f from 0.62 W/(m²K)

WINDOWS MB-86N



MB-86N ST



MB-86N SI

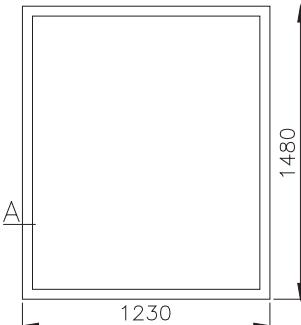
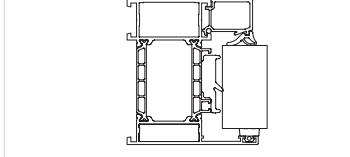
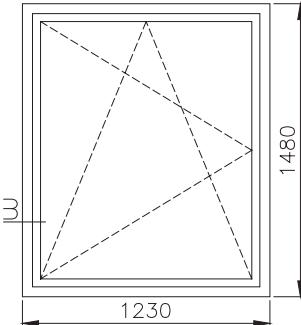
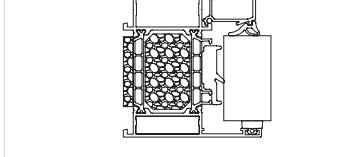
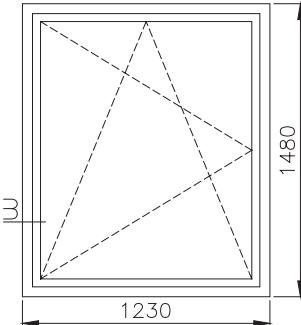
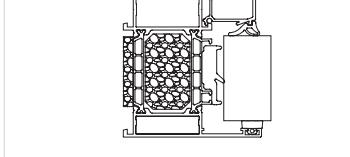
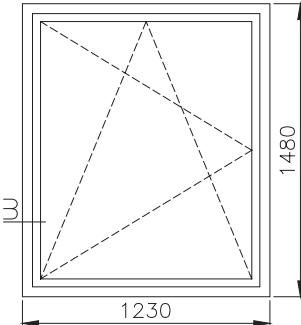
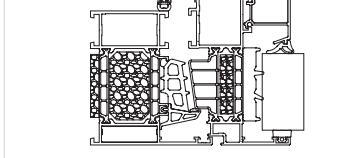


MB-86US



MB-86 Casement


Examples of heat transfer coefficients U_w

| WINDOWS SCHEMES | SECTION A OR B | Value U_w W/(m ² K) for construction with double chamber glass and warm spacer | |
|--|--|---|-----------|
| | | $U_g=0.5$ | $U_g=0.7$ |
|  A |  MB-86N ST | 0.79 | 0.96 |
| | | K528612X | |
|  B |  MB-86N SI | 0.89 | 1.02 |
| | | K528612X + K528702X | |
|  A |  MB-86N ST | 0.67 | 0.83 |
| | | K528612X | |
|  B |  MB-86N SI | 0.76 | 0.89 |
| | | K528612X + K528702X | |

 **DOORS MB-86N**



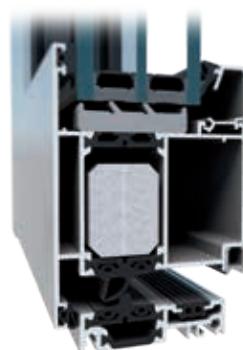MB-86N ST









MB-86N SI




MB-86N SI+

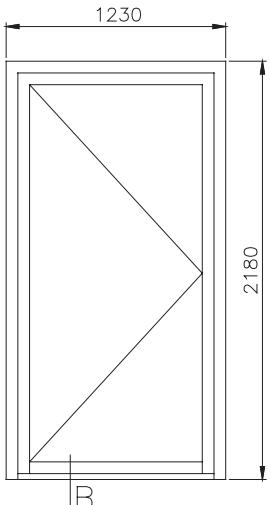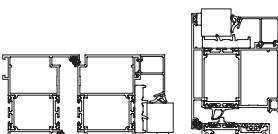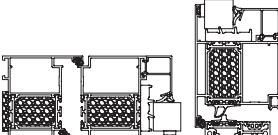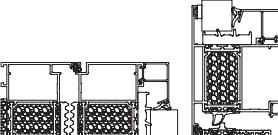Examples of heat transfer coefficients U_D

| DOORS SCHEMES | SECTION A OR B | Value U_D W/(m ² K) for construction with double chamber glass and warm spacer | |
|---|---|---|-----------|
| | | $U_g=0.5$ | $U_g=0.7$ |
|  | MB-86N ST | 1.10 | 1.23 |
| | K528731X+K528746X+K528770X | | |
| |  | | |
| |  | | |
|  | MB-86N SI | 0.97 | 1.10 |
| | K528731X+K528746X+K528770X | | |
| |  | | |
| |  | | |
|  | MB-86N SI+ | 0.88 | 1.01 |
| | K528731X+K528746X+K528770X | | |
| |  | | |
| |  | | |

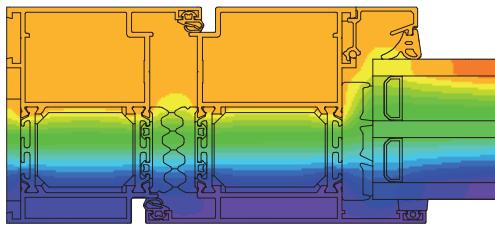

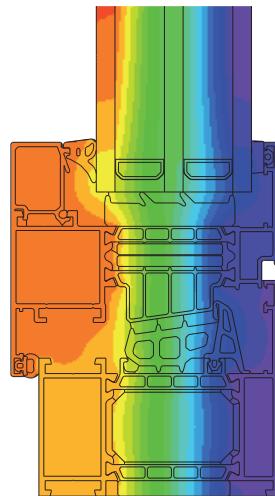Distribution of isotherms in **MB-86N SI+** door



Distribution of isotherms in **MB-86N SI** window

FEATURES AND AESTHETICS

- wide range of profiles guarantees the desired aesthetics and resistance
- with its new shape, wide thermal breaks allow the use of an additional barrier in the profiles' insulation zone
- two-component, central gasket seals perfectly and thermally insulates the space between the casement and the frame
- glazing strips with additional sealing, comes in three versions: Standard, Prestige and Style
- profiles' shapes are well adapted to numerous multi-point locking systems, including concealed hinges
- a wide range of glazing allows the use of all common types of windows triple glazing units, acoustic or security panes
- option to use Earthline decorative slats on panel doors, together with a frame adapted to match
 - ideal for achieving a unified appearance with façades clad in these slats
- doors offering outstanding reliability and exceptional durability, as confirmed by SKG testing for one million opening and closing cycles
 - especially suitable for retail and public buildings
- profiles' drainage functionality is available in two versions: traditional and concealed
- anti-burglary windows and doors up to RC4 class

| TECHNICAL SPECIFICATION | MB-86N | MB-86B | MB-86US | MB-86 Casement |
|------------------------------------|---|---|--|--|
| Depth of frame (window / door) | 77 mm / 77 mm | 77 mm / 77 mm | 77 mm | 77 mm |
| Depth of leaf (window / door) | 86 mm / 77 mm | 86 mm / 77 mm | 80.8 mm | 77 mm |
| Glazing range (window / door) | frame: 8.5 to 61 mm leaf: 17.5 to 70 mm / frame: 8.5 to 61 mm | frame: 13 to 61 mm leaf: 21 to 70.5 mm / frame: 13 to 61 mm | frame: from 7 to 52 mm leaf: from 15 to 60 mm | frame: from 13 to 61 mm leaf: from 22 to 70 mm |
| PROFILES DIMENSIONS | | | | |
| Max. size (H×W) (window / door) | H to 3000 mm L to 1700 mm / H to 3000 mm L to 1400 mm | H to 2500 mm L to 1500 mm / H to 2600 mm L to 1400 mm | H to 2500 mm L to 1600 mm | H to 2500 mm L to 2400 mm / H to 2800 mm L to 1400 mm |
| SIZE LIMITATIONS | | | | |
| Solutions (window / door) | fixed window, side-hung window, hopper window, tilt-and-turn window, single & double outward and inward openable door | fixed window, side-hung window, hopper window, tilt-and-turn window | fixed, side-hung, awning and bottom-hung | |

| PERFORMANCE | MB-86N | MB-86B | MB-86US | MB-86 Casement |
|--|--|---|------------------------|--------------------|
| Air permeability (window / door) | class 4, EN 12207 | class 4, EN 12207 | class 4, EN 12207 | class 4, EN 12207 |
| Water tightness (window / door) | class E 4800*, EN 12208, class E1500, EN 12208 / class E1350 Pa | class 9A, EN 12208 / class 6A, EN 12208 | class E 1350, EN 12208 | E1950 Pa, EN 12208 |
| Thermal insulation (window / door) | U_w from 0,62 W/(m ² K)* U_w from 0,68 W/(m ² K)** U_b from 0,80 W/(m ² K)*** | — | — | — |
| Windload resistance (window / door) | class CE3330 (3330Pa) EN 12210 / class C5 (2000Pa), class B5 (2000Pa) EN 12210 | class C4, EN 12210 / class C5, EN 12210 | class C5, EN 12210 | class C5, EN 12210 |
| Impact resistance (window / door) | — | class 3 / class 3 | — | class 3 / class 3 |

* - U_w for MB-86N SI-based fixed window casement size 1700×2800 mm, with glazing $U_g=0,5$ W/(m²K)

** - U_w for MB-86N SI-based openable window casement size 1700×2150 mm, with glazing $U_g=0,5$ W/(m²K)

*** - U_b for MB-86N SI+ door size 1400×3000 mm, with glazing $U_g=0,5$ W/(m²K)